

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number  
WO 2004/056629 A1

(51) International Patent Classification<sup>7</sup>: B60T 7/08, 11/00

(21) International Application Number:  
PCT/NO2003/000439

(22) International Filing Date:  
23 December 2003 (23.12.2003)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:  
20026230 23 December 2002 (23.12.2002) NO

(71) Applicants and

(72) Inventors: VIK, Per, Espen [NO/NO]; Naustheller,  
N-5394 Kolbeinsvik (NO). VIK, Lars, Eivind [NO/NO];  
Nordre Vik, N-5394 Vinnevig (NO).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,  
CU, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TT, TZ, UA, UG,  
US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(74) Agent: A/S BERGEN PATENTKONTOR; P.O. Box  
1998, Nordnes, N-5817 Bergen (NO).

Published:

— with international search report

[Continued on next page]

(54) Title: DEVICE OF A BRAKE SYSTEM

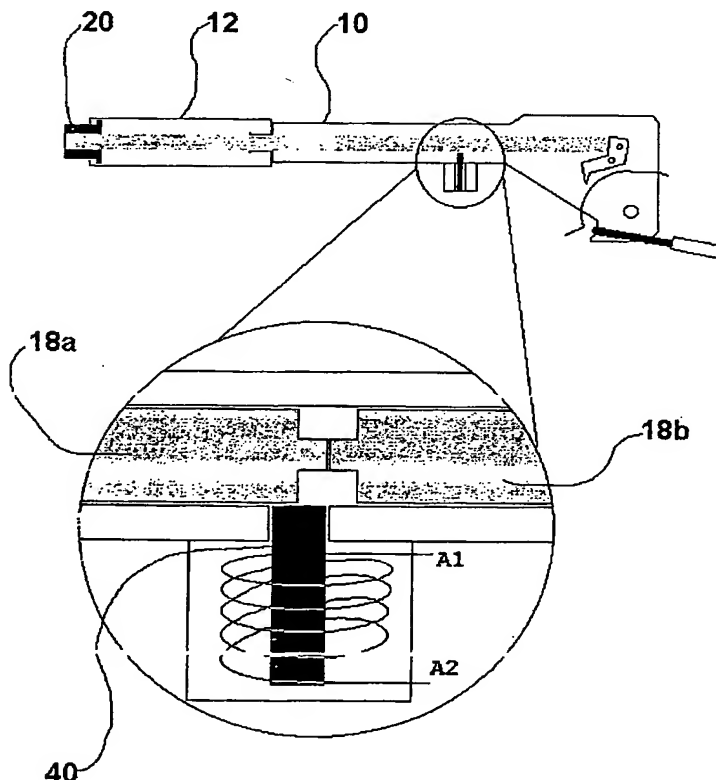

(57) Abstract: A device is described for a parking brake system for vehicles, said parking brake comprises a brake lever that can reset the brake system between an active brake position and a neutral position, and also a transmission mechanism (18) to make it possible to reset the brake lever from the braking position, with the mentioned operation of the transmission mechanism (18) being dependent on the ignition system of the vehicle being activated/turned on. The device is characterised in that a blocking appliance with a blocking peg that is in blocking engagement with the transmission mechanism (18) when the appliance is not supplied with a voltage from the ignition system, and disengages from the blocking engagement with the mechanism (18) when the appliance is supplied with a voltage.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Device for parking brake system dependent on the ignition system

The present invention relates to a device of a parking  
brake system for vehicles, said parking brake comprises a  
5 brake lever that can reset the brake system between an  
active brake position and a neutral position, and also a  
transmission mechanism to make it possible to reset the  
brake lever from the brake position, as the mentioned  
operation of the transmission mechanism is dependent on the  
10 ignition system of the vehicle being activated/turned on.

There are previously known solutions where the use of a  
parking brake is controlled by the electrical system of a  
vehicle, and reference is made to US Patents 4,519,653,  
15 5,134,764 and 5,624,352. However, the known solutions are  
not related to the use of a brake lever.

It is an aim of the invention to provide a new solution for  
the operation of a brake lever.

20 The aim of the invention is primarily to be able to  
safeguard the vehicle against unintended use by providing a  
device that influences the use of the parking brake of the  
vehicle, for example, as a result of an accident.

25 Thus, it is an aim of the present invention to provide a  
new device that shall be able to prevent the handbrake of a  
vehicle being unintentionally released. Such a release can  
be due to a person trying to steal the car.

It is also an aim of the invention to be able to prevent children being able to release the parking brake so that the vehicle starts to roll.

5

Most cars have their own parking brake system in the form of a separate drum-brake that operates on the back wheels, but it can also be formed in other ways. This brake system is constructed completely independently of the car's main  
10 brake system, and is only intended for use when the car is parked, but it is also used as an emergency brake.

A parking brake can also comprise a handbrake, as it is formed as a lever that is operated by the driver's hand.  
15 The brake lever is either placed in the dashboard and is pulled out to a position where a locking pin locks the lever, or it is placed between the front seats and the brake is activated by it being pulled up.

20 The device according to the present invention is characterised in that a blocking appliance with a blocking peg that is in blocking engagement with the transmission mechanism when the appliance is not supplied with a voltage from the ignition system, and disengages from the blocking  
25 position with the mechanism when the appliance is supplied with a voltage.

The preferred embodiment of the invention appears in the subsequent claims 2-11.

30

According to the invention, the device is applied in a vehicle where the hand-operated lever is arranged to be pulled in the longitudinal direction between the two  
positions, or to be rotated around a fulcrum between the  
35 two positions.

The invention shall be explained in the following in connection with the latter solution with a retractable

handbrake lever placed between the seats. Thus, reference shall be made to the following figures, in which:

Figure 1 shows the standard system for a parking brake of a  
5 vehicle.

Figure 2 shows an enlarged side perspective of the inventive locking appliance in neutral position. The magnetic field coil is here applied with a voltage and the  
10 locking pin is disengaged from the locking position.

Figure 3 shows an enlarged side perspective of the inventive locking appliance in its relaxed position. Here, a voltage is not applied to the magnetic field coil and the  
15 locking pin is in its normal position. In this case the locking pin will prevent the use of the locking button.

Figure 4 shows the electrical connections for operation of the appliance according to the invention.  
20

Figures 5 and 6 show the two different positions of the locking pin, and also the positions where the forward section 18 can push on the rear rod section 18b, and the other pin position where the pin blocks the displacement of  
25 the rod 18b by the rod 18a.

Initially, reference shall be made to figure 1 that illustrates a handbrake lever 10 which the driver can operate with his fingers gripping the forward handle  
30 section 12. At the rear, the lever 10 is rotary mounted in a fulcrum 14 in a base part 16 that is fixed to the floor of the vehicle (car).

A release rod 18 with a forward release button 20 runs  
35 alongside and freely inside the lever 10. The release rod 18 is divided in two with the forward rod section 18a running between the release button 20 and the locking pin 40 itself. A rear rod section 18b runs from the locking pin

40 and backwards. The forward and rear rod sections 18a, 18b are not connected to each other.

At the back, the rear rod section 18b is mounted at 19 in a  
5 locking catch 22 which is rotary mounted around an axis of rotation 24 in the rear frame part 11 of the lever 10 which, in the figure, lies outside the base part 16. The other end of the catch 22 comprises a locking peg 26 which can be brought into sequential engagement with  
10 correspondingly shaped notches/recesses 28 in the frame part 16. The catch 22 is spring loaded so that it is forced anti-clockwise so that the peg 26 falls down into the "nearest" notch 28. By the user pushing in the visible button 20 foremost on the lever 10 with the thumb, the  
15 locking peg of the catch 22 is flipped out of engagement in the base part 6 and the lever 12 can be pulled up in the direction of the arrow P.

The wire that operates the brake itself is shown by 30. It  
20 runs back to the brake drum/disk through the stocking 32. When the lever 10 is pulled up, simultaneously with the button 20 being depressed, the wire 30 is pulled forward and the brake is activated. When the button is released again, the peg 26 falls down into the nearest notch in the  
25 base. When the lever 10 is pulled up, it will be locked in this position.

In order to release the parking brake, the button 20 must be pushed in so that the peg 26 is pulled out of its  
30 engagement with the base 16.

According to a preferred embodiment, this parking brake construction is modified so that the catch element 22 can not be reset to a neutral position (where the peg 26 is  
35 released from the locking engagement) without the user/driver operating the ignition system of the vehicle.

Reference shall again be made to figure 1 that shows the abovementioned locking pin 40 arranged in a housing 42 in connection with the rod 10. The locking pin can be reset between two positions. In the one position the locking pin  
5 40 is displaced in a blocking recess/notch 44 which is formed in an intermediate space between the forward and the rear rod sections 18a,b. The recess 44 is formed by a segment of the rear part of section 18a and the forward part of section 18b, respectively, being cut away, said  
10 recess can accommodate the locking pin 40 when it is activated into a position of locking the brake.

When the pin is in the recess 44, the button 20 can not be pushed in and the lever 10 remains standing in its locked  
15 position. However, this does not prevent rotation of the lever 10 in the pulling out direction (P). In the other position the locking pin 40 is pulled back and (forward section 18a off) the release rod 18 is free to be operated. The rear section 18b runs free all the time in relation to  
20 the locking pin.

The locking pin, with help of a pre-tension mechanism in the form of a spring connected to the housing is initially arranged to stand permanently in an upper locking position  
25 with the locking pin engaged with the locking notch 44 on the release rod 18.

The resetting of the locking pin 40 is carried out with the help of a magnetic field coil 50 that is wound around the  
30 locking pin 40 inside the housing 42. The two connecting contacts for the coil are denoted by A1 and A2, respectively. The magnetic field coil 50 is arranged to be supplied with electricity from the vehicle's electrical system. When the coil 50 is supplied with electricity, a  
35 magnetic field is created that pulls/pushes the pin 40 downwards and out of the engagement with the blocking notch 44. Then, the handbrake lever 10 can be moved freely and the brake is released when the button 20 is pushed in. The

pin must either be of a robust design which withstands direct engagement in the locking groove, or the locking pin with associated mechanism, must be constructed so that the movement and power is transmitted to a separate mechanism  
5 that engages with the locking notch in the release rod.

The magnetic field coil (50), which is called a solenoid in English, will be supplied with a voltage across the connecting points, designated + and - (plus and minus),  
10 respectively, when a voltage (current with a voltage) is applied to the control relay (7) for the magnetic field coil (50). The control relay for the magnetic field coil gets a voltage when the car's ignition is switched on (K2 closes). The circuits are made safe with fuses as shown in  
15 the drawing (1F1, 2F1, 3F1 and 3F2). The voltage that is applied to the relays and the magnetic field coil is a direct current (DC).

The system is formed so that when the ignition system of the vehicle is turned off, the locking pin will stand in  
20 the upper locking position and prevent the power transmission between the button 20 and the catch construction 22. The ignition system of the vehicle must be turned on for it to be possible to pull out the locking pin, as the magnetic field coil is controlled by the car's  
25 electrical system. When the ignition system is activated, the pin is pulled out (downwards) and the handbrake can be released.

At the same time, it shall be possible to pull the  
30 handbrake and activate the brake independently of the position of the locking pin 40. Therefore, it is not necessary to activate the ignition system of the vehicle to pull the handbrake. Thus the locking pin is normally in a locking position when the magnetic field coil is not  
35 supplied with a voltage.

The reason that the release rod 18 is divided into two 18a,b is that the rear section 18b must be able to run



freely because this will move according to the movements of the locking catch when the handbrake is pulled. The locking pin 40 shall, in its locked position (without voltage) prevent operation of the release button 20 by blocking the movement of the forward section 18a of the release rod 18a. The locking pin 40 does not prevent movement of the rear section of the release rod 18b, because this moves backwards and the locking pin 40 is placed in front.

The handbrake, as it is in today's cars, can be pulled without holding in the release button when pulling. Then one can hear the characteristic sound of the handbrake (the sound of the locking peg falling into each successive notch) In such cases, the release button and release rod will follow the movement of the locking peg and move for each notch the locking peg falls into.

The rear part of the release rod 18b will always follow the movement of the locking peg, while the forward part of the release rod 18a will only follow these movements when the locking pin 40 is out of locking position. One will hear the same sound from the handbrake when one pulls it, but if the locking pin 40 is in locking position one will experience that the release button does not move in step with the locking peg and the catch.

Figure 5 shows how the rod 18a impinges on the rod 18b and pushes this backwards, while figure 6 shows the rear rod section 18b being pulled backwards.

Figure 2 shows the situation where the ignition is turned on and the coil is supplied with a voltage so that the pin 40 is pulled out.

The situation where the ignition is turned off is shown in figure 3. No voltage is applied to the coil and the pin is pushed upwards in the groove (notch) 44 between the two rod sections 18a,b by the pre-tension.

To illustrate how the connection can be made, reference shall be made to figure 4 which shows the central part of the ignition system. The figure shows the electrical  
5 circuit of the vehicle where the battery (12V) is connected to the ignition lock S1, the fuse system, the relays K1, K2, K3 (7) and the coil 50.

It can be seen in figure 4 that the car's ignition is not  
10 turned on and the magnetic field coil is thereby not activated either. If we assume that the handbrake is pulled up, the pin will be in the locked position. When the driver now puts the key in the ignition lock and turns it, the electrical circuit is activated, the coil is live and the  
15 pin 40 is pulled out and the handbrake can be released.

The fundamental principle for the present invention is that the electrical system must be connected for it to be possible to release the handbrake. The handbrake can be  
20 reset from a neutral position to a locked position independent of the ignition system being turned on, but not the other way round.

The description given here concerns a mechanical brake  
25 system, but it can, of course, be valid for all types of parking brake systems.

Furthermore, it is possible to use other release mechanisms than an electrically driven electromagnetic coil. Thus, air  
30 pressure systems or hydraulics can also be used to prevent the unintended release of the parking brake of a vehicle.

Today's technology implies that one must use, for example, the original car key or an "opening system", i.e. open the  
35 car's computer system, for it to be possible to turn on the ignition. In today's cars, one can not turn on the ignition by simply connecting wires underneath the dashboard or under the bonnet.

Claims.

1. Device for a parking brake system for vehicles, said parking brake comprises a brake lever that can reset the  
5 brake system between an active brake position and a neutral position, and also a transmission mechanism (18) to make it possible to reset the brake lever from the brake position, as the mentioned operation of the transmission mechanism (18) is dependent on the ignition system of the vehicle  
10 being activated/turned on, characterised in that a blocking appliance with a blocking peg which is in blocking engagement with the transmission mechanism (18) when the appliance is not supplied with a voltage from the ignition system, and comes out of blocking engagement with the  
15 mechanism (18) when a voltage is applied to the appliance.

2. Device according to claim 1, characterised in that the blocking appliance comprises a magnetic field coil (50) which is wound round the locking pin (40), and when the  
20 magnetic field coil (50) is applied with a current from the ignition system, a magnetic field is formed that pulls or pushes the pin (40) out from its blocking engagement with the transmission mechanism (18).

25 3. Device according to claims 1-2, characterised in that the magnetic field is arranged to act against a spring mechanism, said spring mechanism contributes to engage the locking pin (40) in the blocking notch (44) on the release rod (18) when a voltage is not  
30 applied to the coil.

4. Device according to claims 1-3, characterised in that the magnetic field coil/solenoid (50) is supplied with a voltage when a control relay (7) for the  
35 magnetic field coil (50) is supplied with a voltage, said

control relay gets a voltage when the car's ignition is turned on (K2 closes), said voltage which is applied to the relays and the magnetic field coil is a direct current (DC).

5

5. Device according to claims 1-4,  
characterised in that the transmission mechanism is formed by an extended rod (18) that comprises a recess or notch (44) which can accommodate the locking pin (40) when this  
10 is activated to the locking position of the brake.

6. Device according to any of the preceding claims,  
characterised in that the release rod (18) comprises a forward rod section (18a) and a rear rod section (18b),  
15 said rod sections (18a,18b) are not mutually connected, and the recess (44) is formed by a segment of the rear part of section (18a) and the forward part of section (18b), respectively, being cut away.

20 7. Device according to any of the preceding claims,  
characterised in that the rear rod section (18b) is mounted in a locking catch (22) that, for the operation of the brake itself, is rotary mounted around an axis of rotation (24) in the rear frame part (11) of the lever/rod (10;18).  
25

9. Device according to any of the preceding claims,  
characterised in that the release rod is a hand-operated brake lever (10) which is arranged to be pulled in the longitudinal direction between the two positions, or to  
30 rotate around a fulcrum (14) between the two positions.

10. Device according to any of the preceding claims,  
characterised in that the user operates the rod (18) by way of a push-button (20) in the one rod end.  
35

11. Device according to any of the preceding claims,  
characterised in that it is applied in connection with a brake lever that is placed in the dashboard and is pulled

out to a position where a locking pin locks the lever, as the locking pin is controlled between blocking position and neutral position as given in the preceding claims.

FIG. 1

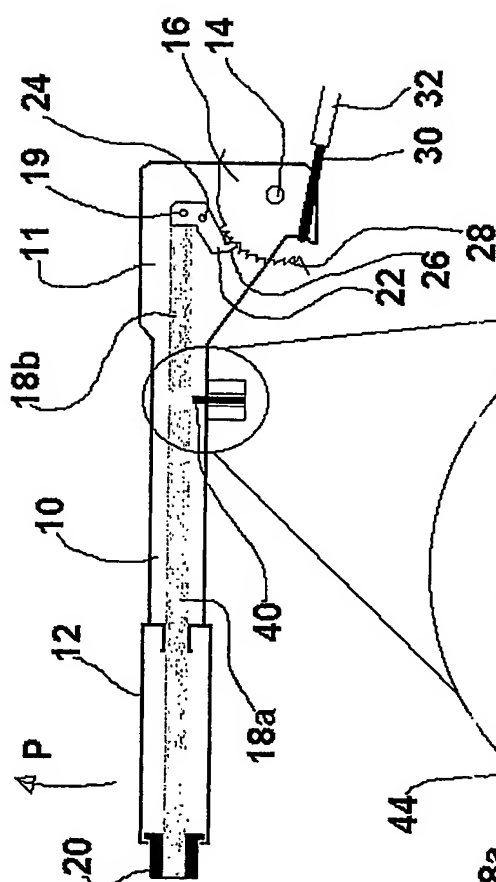


FIG. 2

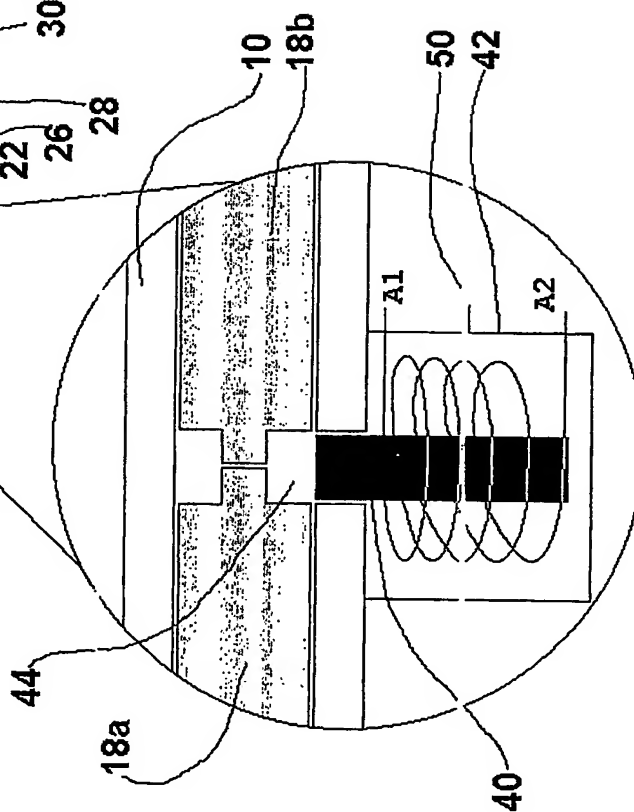


FIG. 3

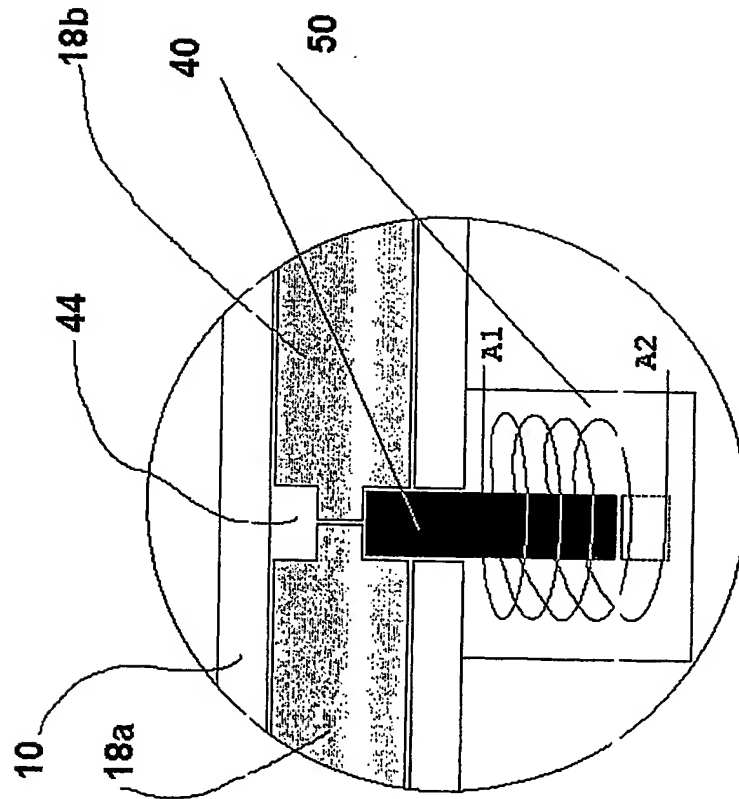
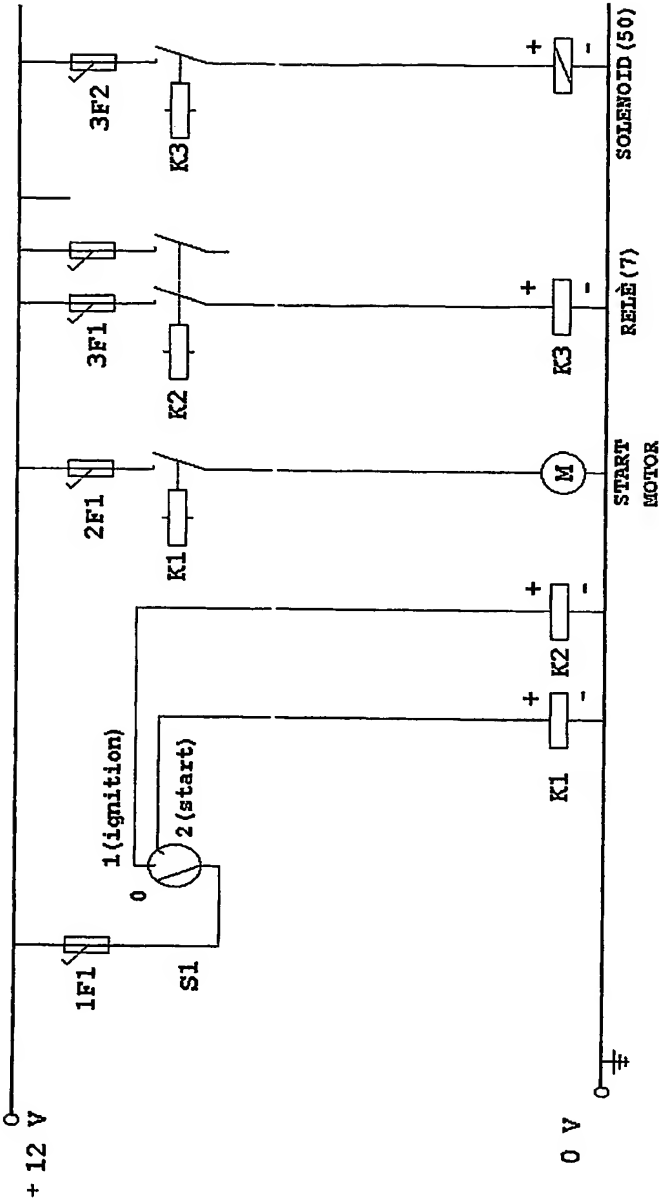


FIG. 4





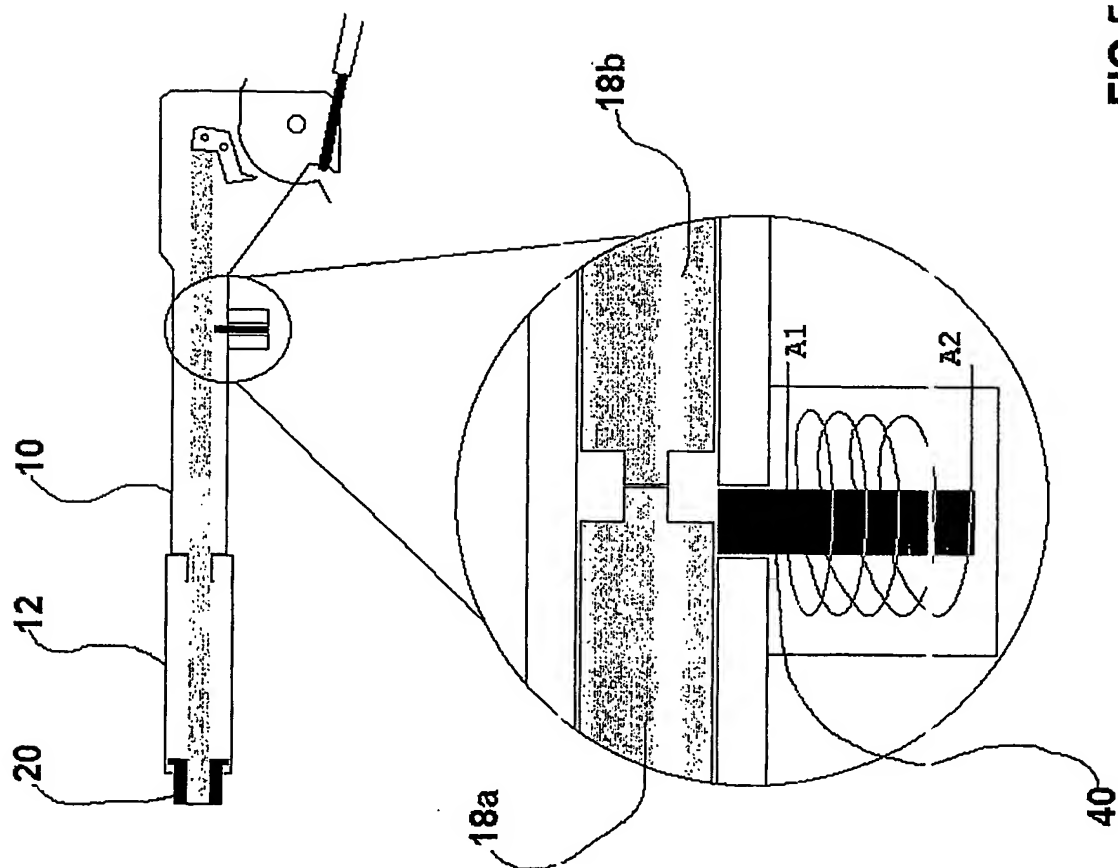


FIG.5

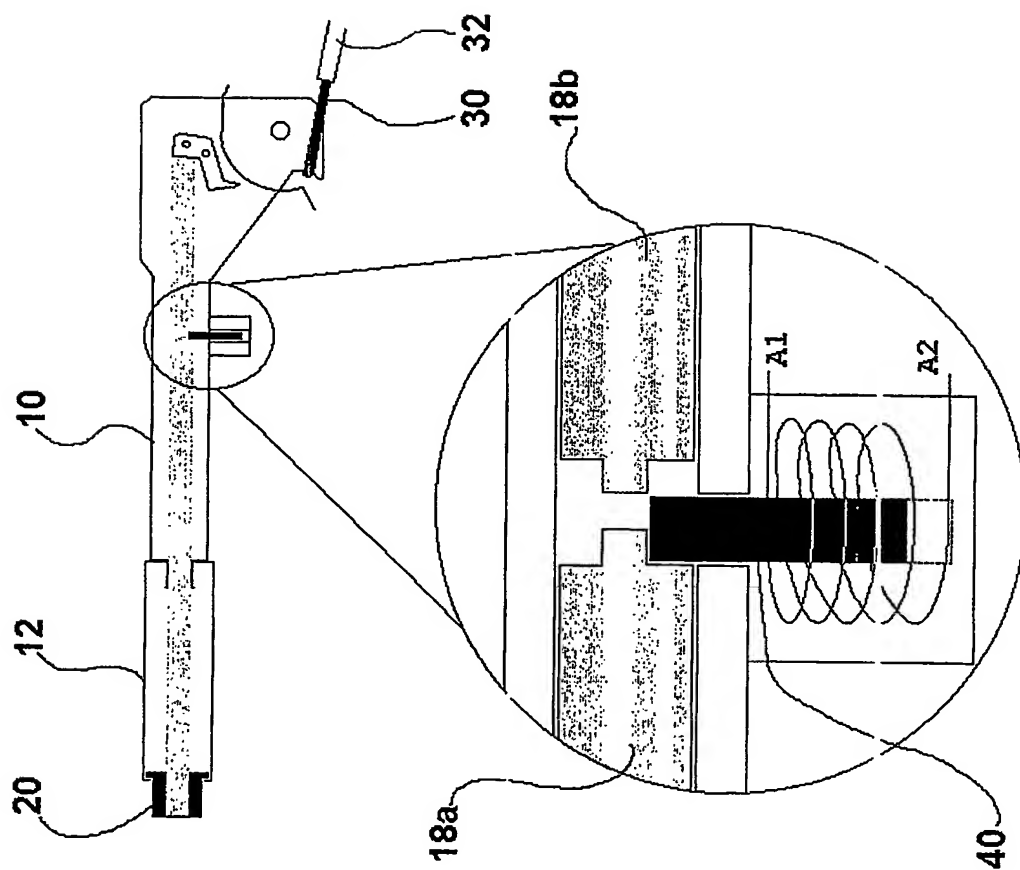


FIG. 6

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2003/000439

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: B60T 7/08, B60T 11/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: B60T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 3921507 C1 (STEGEER, PETER), 24 January 1991 (24.01.1991), figure 1, abstract --	1,2,3,4,7,9, 10,11
X	US 5624352 A (SMALE), 29 April 1997 (29.04.1997), column 1, line 53 - column 2, line 64, abstract --	1,2,3,4,7,9, 10,11
X	GB 451256 A (DAVID TODD GEMMILL), 31 July 1936 (31.07.1936), page 3, line 39 - line 92, figure 3 --	1,2,3,4,7,9, 10,11
A	US 20010020377 A1 (MATSUZAKI ET AL), 13 Sept 2001 (13.09.2001), page 2, line 10 - page 4, line 6, figures 11-18, abstract --	1-11

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

10 June 2004

Date of mailing of the international search report

11-06-2004

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Carl Fröderberg/EK

Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

30/04/2004

International application No.

PCT/NO 2003/000439

DE	3921507	C1	24/01/1991	NONE		
US	5624352	A	29/04/1997	DE	19636080 A	06/03/1997
				GB	2304867 A,B	26/03/1997
				GB	9617935 D	00/00/0000
GB	451256	A	31/07/1936	NONE		
US	20010020377	A1	13/09/2001	NONE		